



NEW!

ENGINE

| | |
|-----------------|---|
| Model | : ISUZU-AQ-6HK1X |
| Type | : Water-cooled, 4 cycle, 6 cylinders, line type direct injection, turbocharger, intercooler, electronic diesel engine |
| Power | : 215 HP (161 kW) @1800 rpm / SAE J1995 (Gross) : 207 HP (154 kW) @1800 rpm / SAE J1349 (Net) |
| Max. Torque | : 940 Nm @1500 rpm (Gross) : 903 Nm @1500 rpm (Net) |
| Displacement | : 7790 cc |
| Bore and Stroke | : 115 mm x 125 mm |
| Emission Class | : Stage IV / Tier 4 Final (EU/EPA) |

SUB-FRAME

| | |
|---|-------------------------------|
| X Type Lower Frame Construction Pentagon Box Type Chassis | |
| Shoe | : Triple grouser |
| No. Of Shoes | : 2 x 51 pieces |
| No. Of Lower Rollers | : 2 x 9 pieces |
| No. Of Upper Rollers | : 2 x 2 pieces |
| Full Trackguard | : 2 x 3 pieces |
| Track Tensioning | : Hydraulic Spring Tensioning |

CAB

- Improved operator's all round visibility
- Increased cabin internal space
- Use of six viscomount cabin mountings that dampen the vibrations
- High capacity A/C
- High resolution, led backlight, color LCD display
- Opera Control System
- Cooled storage room
- Glass holder, book and object storage pockets
- Pool type floor mat
- Improved operator's comfort through versatile adjustable seat
- Ergonomically redesigned cabin through relocated switch board, and re-styled travel pedals and joysticks.

TRAVEL AND BRAKES

| | |
|-------------------------|---|
| Travel | : Fully hydrostatic |
| Travel Motor | : Axial piston motor with 2 speed stages and inclined plate |
| Reduction | : Planetary gear system with 2 stages |
| Travel Speed | |
| High Speed | : 5,1 km/h |
| Low Speed | : 3,0 km/h |
| Max Traction | : 25.460 kgf |
| Gradeability | : 35° (70%) |
| Parking Brake | : Hydraulic, disc type with automatic warning |
| Ground pressure (600mm) | : 0,61 kgf/cm ² |

LUBRICATION

Centralized lubrication system is provided for lubrication all difficult-to-reach parts on the components, such as boom and arm

HYDRAULIC SYSTEM

| | |
|--------------------------|---|
| Main Pump | |
| Type | : 2 axial piston type pumps with doublevariable displacement and inclined plate |
| Max. Flow Rate | : 2 x 259 L/min |
| Pilot Pump | : Gear type, 30,5 L/min |
| Working Pressures | |
| Cylinders | : 350 kgf/cm ² |
| Power Boost | : 380 kgf/cm ² |
| Travel | : 350 kgf/cm ² |
| Swing | : 285 kgf/cm ² |
| Pilot | : 40 kgf/cm ² |
| Cylinders | |
| Boom | : 2 x ø 135 x ø 95 x 1.455 mm |
| Arm | : 1 x ø 150 x ø 105 x 1.760 mm |
| Bucket | : 1 x ø 135 x ø 95 x 1.195 mm |

OPERA CONTROL SYSTEM

- Easy-to-use control panel and menu
- Improved fuel economy and productivity
- Maximum efficiency by selection of power and work modes
- Overheat prevention and protection system without interrupting the work
- Automatic powerboost switch-on and switch-off
- Automatic electric power-off
- Maintenance information and warning sytek
- Error mode registry and warning system
- Ability to adjust hydraulic flow from Opera screen
- Maintenance information and warning system
- Automatic powershift to improve performance
- Selection of multi-language on control panel.
- Real time monitoring of operational parameters such as pressure, temperature, engine load
- Anti-theft system with personal code
- Possibility to register 27 different operating hours
- Rear-view, arm-view camera (Optional)
- Hidromek Smartlink (Optional)

SWING SYSTEM

| | |
|--------------|---|
| Swing Motor | : Axial piston type integrated with shock absorber valves |
| Reduction | : 2 stage planetary gear box. |
| Swing Brakes | : Hydraulic multi disc type, automatic warnings |
| Swing Speed | : 10,10 rpm |

CAPACITY

| | | | |
|------------------|---------|-----------------------|--------|
| Fuel Tank | : 475 L | Engine Oil | : 37 L |
| Hydraulic Tank | : 210 L | Engine Cooling System | : 55 L |
| Hydraulic System | : 395 L | Urea tank | : 70 L |



ELECTRICAL SYSTEM

| | |
|----------------|---------------------|
| Voltage | : 24 V |
| Battery | : 2 x 12 V / 150 Ah |
| Alternator | : 24 V / 50 A |
| Starting Motor | : 24 V / 5 kw |

WEIGHT

| | |
|-----------------------------------|-------------|
| Standard machine operating weight | : 32.100 kg |
|-----------------------------------|-------------|

Operational weight, complying with the ISO 6016 standards, includes full fuel tank, hydraulic system and other liquids, 75 kg operator weight and standard equipped machine weight. Optional equipments are not included.

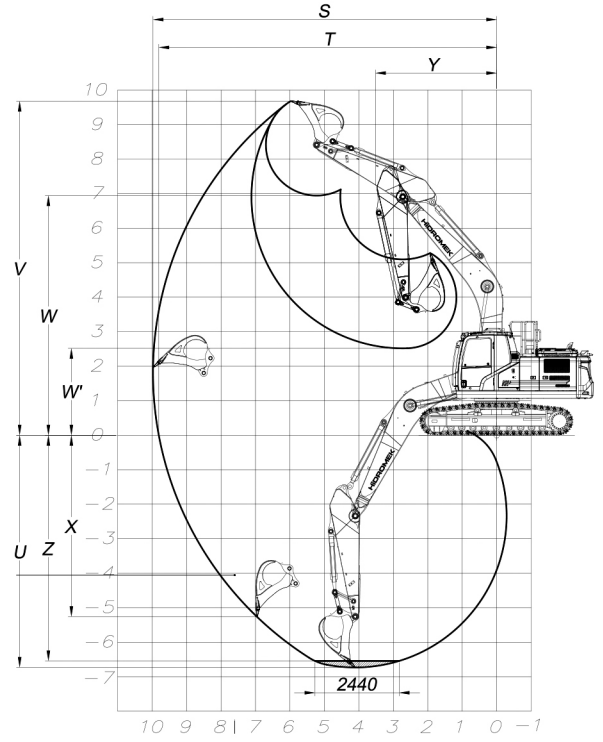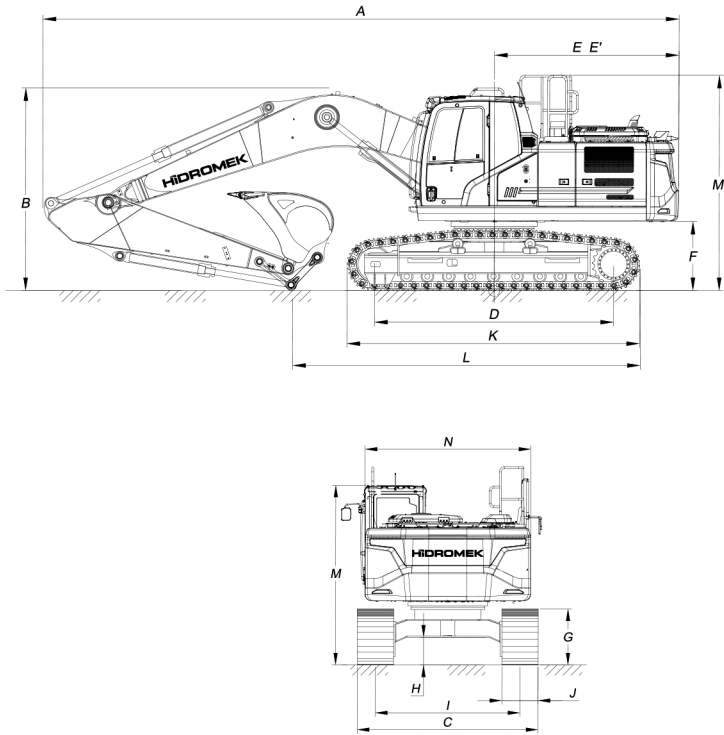

GENERAL DIMENSIONS

| Boom Dimension | 6.280 mm | | |
|--------------------------------------|-----------|-----------|-----------|
| Arm Dimension | 2.100 mm | *2.500 mm | 3.070 mm |
| A - Overall Length | 10.930 mm | 10.880 mm | 10.790 mm |
| B - Overall Height (to top of boom) | 3.580 mm | 3.490 mm | 3.320 mm |
| C - Overall Width | 3.200 mm | | |
| D - Idler Distance | 4.030 mm | | |
| E - Counterweight Distance | 3.235 mm | | |
| E' - Turning Radius | 3.255 mm | | |
| F - Upper Structure Ground Clearance | 1.205 mm | | |
| G - Crawler Height | 1.070 mm | | |
| H - Minimum Ground Clearance | 500 mm | | |
| I - Track Gauge | 2.600 mm | | |
| J - Shoe Width | 600 mm | | |
| K - Overall Length of Crawler | 4.950 mm | | |
| L - Length Over Ground | 7.540 mm | 6.780 mm | 5.860 mm |
| M - Overall Height (to Top of Cab) | 3.140 mm | | |
| N - Upper Structure Width | 2.990 mm | | |

* Standard

WORKING DIMENSIONS

| Boom Dimension | 6.280 mm | | |
|---|-----------|-----------|-----------|
| Arm Dimension | 2.100 mm | *2.500 mm | 3.070 mm |
| S - Maximum Digging Reach | 10.020 mm | 10.370 mm | 10.910 mm |
| T - Maximum Digging Reach at Ground Level | 9.790 mm | 10.150 mm | 10.700 mm |
| U - Maximum Digging Depth | 6.360 mm | 6.760 mm | 7.330 mm |
| V - Maximum Digging Height | 9.860 mm | 9.990 mm | 10.290 mm |
| W - Maximum Dumping Clearance | 6.870 mm | 7.020 mm | 7.300 mm |
| W' - Minimum Dumping Clearance | 3.790 mm | 3.310 mm | 2.760 mm |
| X - Maximum Vertical Digging Depth | 4.890 mm | 5.140 mm | 5.780 mm |
| Y - Minimum Swing Radius | 4.440 mm | 4.360 mm | 4.280 mm |
| Z - Maximum Digging Depth (2440 mm level) | 6.140 mm | 6.560 mm | 7.160 mm |

* Standard

DIGGING PERFORMANCE

| | |
|--|---------------------|
| Standard Bucket Capacity (SAE) | 1,6 m ³ |
| Bucket Digging Force (Power Boost) ISO | 19.600 (21.300) kgf |
| Arm Crowd Force (Power Boost) ISO | 16.400 (17.800) kgf |

